Air King Ventilation Products®

SPECIFICATIONS
NAVARRA™
RANGE HOODS

Barcelona® Collection Wall Mounted Range Hood
600 CFM/13.5 SONES @ 0.10" WG. HVI CERTIFIED 120 Volts, 2.8 amps, 60 hz.

- **Dimensions**
  Available widths: 36"
- **Hood Body**
  Brushed stainless steel.
- **Motor**
  3 speed, permanently split capacitor motor. Rated 120 volts, 60 hz.
- **Lighting**
  2 - Hi spot ES 16, 50 watt maximum halogen lights.
- **Ducting Options**
  Vertical ducting:6" round duct adapter complete with polymetric back draft damper ensuring quiet operation.

  Ductless: Requiers charcoal filter (not included).
- **Blower Wheel**
  Dual inlet, electronically balanced polymetric centrifugal blower wheel.
- **Mounting**
  Wall mounted. Install 20" to 30" from cooking surface.
- **Filters**
  Grease Filter: Dishwasher safe, BCGF-01 (included).
- **Available Finishes**
  Stainless Steel.

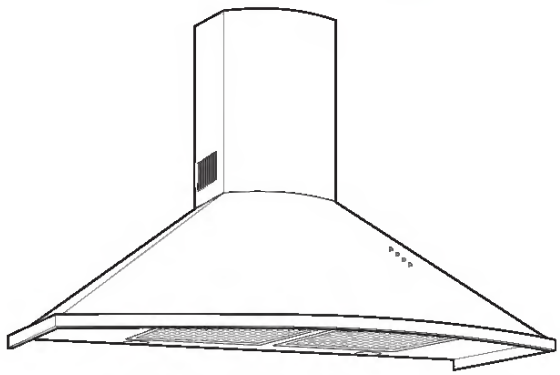

NAV SERIES

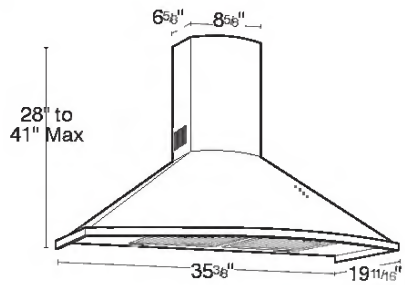

PERFORMANCE

	Static Pressure (inches of w.g.)								HVI Sones @ .1 SP	Fan Speed RPM	Power Watts
	0	0.1	0.25	0.5	0.75	1.0	1.5	2.0			
Air Flow - CFM	607	600	590	571	549	523	456	363	13.5	2560	548

PROJECT		ARCHITECT	
LOCATION		ENGINEER	
CONTRACTOR		SUBMITTED BY	DATE

FAN NUMBER	MODEL NUMBER	CFM	IN W.G.	RPM	WATTS	AMPS	SONES	QTY	OPTIONAL EQUIPMENT & REMARKS

c UL us

2100 HVI CERTIFIED™

U.S.: 820 Lincoln Drive
West Chester, Pennsylvania 19380-4466
Tel: (610) 692-7400 • 877-304-3785
Fax: (610) 696-8048

Canada: 110 Glidden Road
Brampton, Ontario L6T 2J3
Tel: (905) 456-2033
Fax: (905) 456-1015

Downloaded from www.Manualslib.com manuals search engine